
# MONO-COMPONENT INJECTION MACHINE

Composite Alliance Corp. (CAC) offers a complete range of production and laboratory injection machines for thermoset resin processing applications developed thanks to its deep knowledge and expertise of different manufacturing processes (RTM, VaRTM, C-RTM, Infusion).

This mono-component injection machine has been specifically designed to allow different pre-mixed resins or monocomponents to be injected. Available in two tank capacity 10 or 30L (2.6 or 7.9 USGAL), it offers many standard features and options such as: pressure/flow regulation up to 25 bars (368 psi), weighing scales, resin preheating, automatic cleaning module, upgradability to a bi-component model etc...



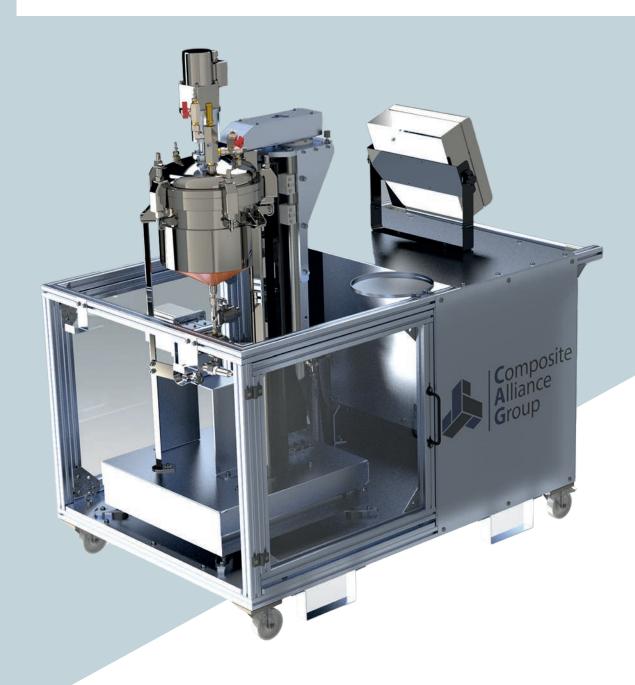

Enhance your injection cycle with a bunch of features



For a bi-co	component machine, ontact our sales team			
5				
	-11 - 11 - 11 - 11 - 11 - 11 - 11 - 11	and James	T. T. T.	
e-t	Jack Jack	-11-11-11	1 1 1 1	ii = = 11 = 1

#### BASIC EQUIPMENT

TME/IM-MONO

PROCESS

RESIN TYPE

FLOW

/ISCOSITY

USEFUL STAINLESS STEEL TANK CAPACIT

TEMPED ATLIDE

POWER SUPPLY

INJECTION PRESSURE

MONITORING

RTM, VARTM, C-RTM, INFUSION

EPOXY

300 CC/MIN | 10 FL OZ/MIN MAX

10-20 000 MM²/S | 0-31 IN²/S

10L-30L / 2.6-7.9 USGAL

20-120°C / 68-248°F

SINGLE-PHASE 240V 60HZ/ SINGLE-PHASE 120V 60HZ

10-25 BARS / 147-368 PSI

9,7" COLOUR HMI TOUCH SCREEN



## **STANDARD FEATURES**

- Tank 10L (2.6 USGAL)
- Heating 120°C (248°F)
- Injection pressure 10 bars (147 psi)
- Stearing
- HMI
- 2m (6.5 ft) long 120°C (248°F) heating pipe
- Pressure and flow regulation



## **SOFTWARE**

- Customizable settings: Recipes (number, volume, designation, tank temperature, injection flow/pressure, injection steps), Renewal purge, Weight scale, Cleaning cycle
- Alarms and reports
- Injection reports generation and exportation (.csv)
- 3 different modes available: User, Programming and Maintenance



#### **OPTIONS**

- Automatic cleaning
- 3m (9.8 ft) long heating pipe (basic equipment includes 2m (6.5 ft) long heating pipe)
- Useful stainless steel tank capacity of 30L (7.9 USGAL)
- Injection pressure up to 25 bars (368 psi)
- Weighing scales

# **CAC** AT A GLANCE

Composite Alliance Corp (CAC) is a global tooling, machinery and service supplier offering a wide selection of standard and custom solutions in support of composite part design and fabrication. Our goal is to advise, equip and assist our customers in using cost effective advanced manufacturing processes to maximize performance and to widen the applications of composites.



